Customer approval :

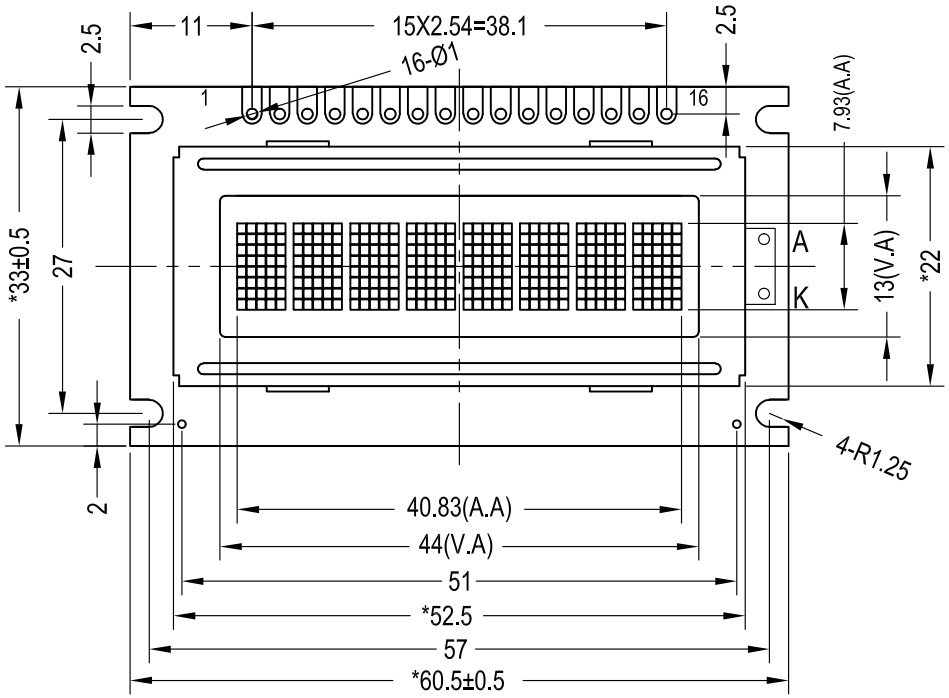

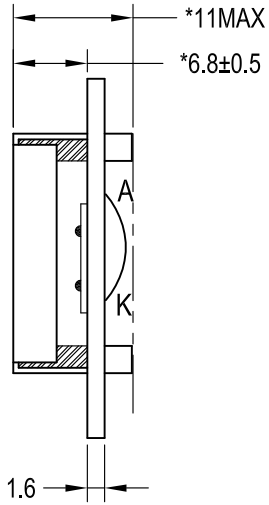





Specification:

1). Driving: Duty:1/8,Bias:1/4, VLCD:4.7V(Ref.), VDD:5.0V
2). Viewing angle: 6 O'clock
3). Display mode:STN/Positive/Transmissive/YG
4). Operating temp.: -20°C～+70°C
Storage temp.: -30°C～+80°C
5). IC: SPLC780D1-001(or compatible)
6). Backlight: Bottom Yellow-Green
7). Dimensions with mark "*" are important,
with mark "()" are referenced

PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	BLK	BLA

REV	REVISION RECORD	DATE
A0	First issue	12/8

TCC®
深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd.

MODEL NO. 模组型号	SYB0801BV10-5C10YL1-B5NG		GENERAL TOL: 未注公差 ± 0.3	
APPROVED BY	CHECKED BY	DRAWING BY	PAGE: 页面 1 OF 1	UNIT: 单位 mm
Liu 2012/12/08	Francis 2012/12/08	Luoxian 2012/12/08	PROJECTION 三角法	