


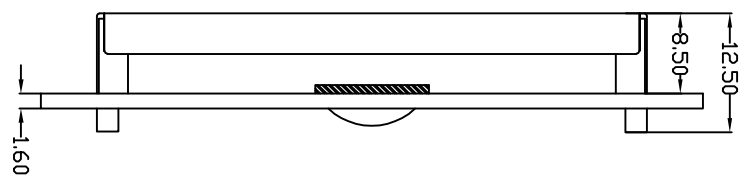


Customer approval :

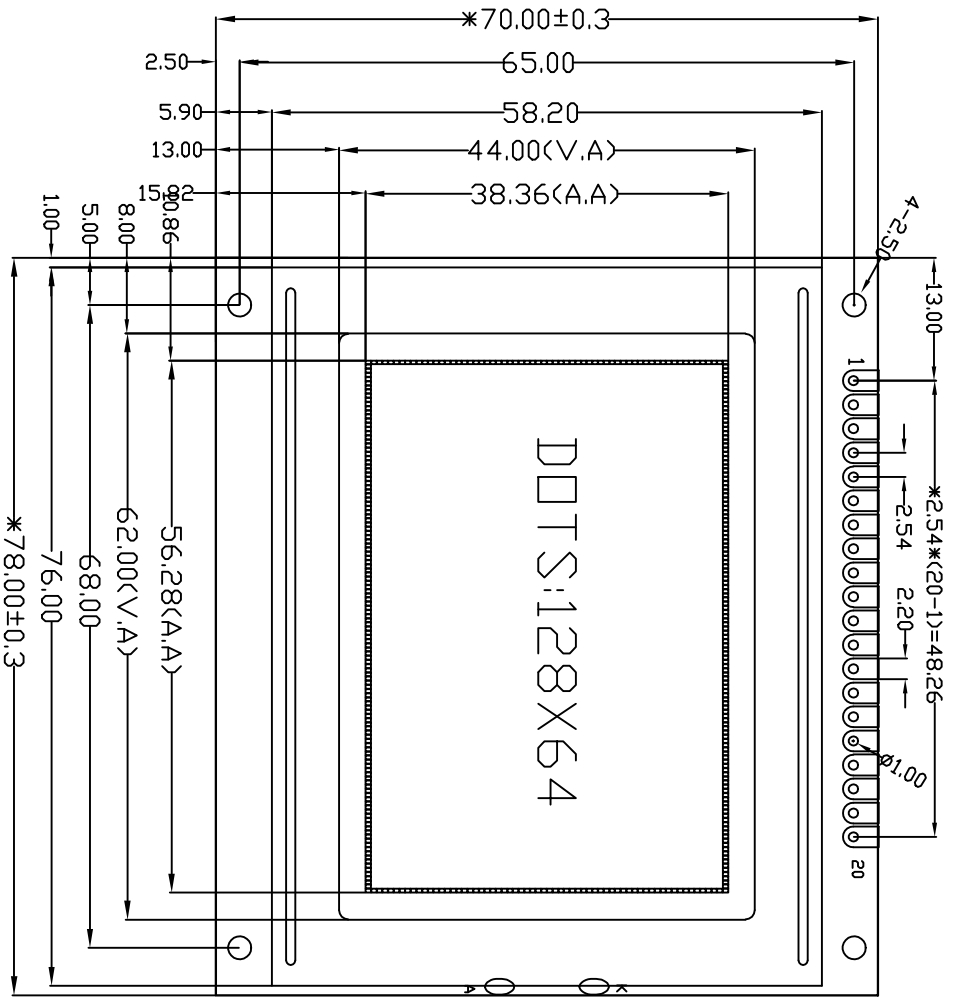

Specification:

- 1). Driving: Dots:128\*64,Duty:1/64,Bias:1/9,VDD: 5V, VOUT: -4.9V,VO: -4.2V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:FSTN,STN/Y-G or BLUE, POSITIVE/TRANSFLECTIVE
- 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
- 5). Controller IC: AIP31107,AIP31108
- 6). Backlight: Bottom White or Y-G
- 7). Dimensions with mark "\*" are important,  
with mark "(") are referenced
- 8). All the raw materials are RoHS compliant

PN	1	2	3	4	5	6	7	8	9	10
CONNECTION	CS1	CS2	GND	VDD	VO	RS	R/W	E	DB0	DB1
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	/RST	VOUT	BLA	BLK

REV	REVISION	RECORD	DATE
A0	First issue		02/25


  
 深圳市三元晶科技有限公司  
 Shenzhen TCC LCD Hi-Tech Co., Ltd

MODEL NO.	SYB12864C2L1-2	GENERAL TOL:	± 0.3
APPROVED BY	CHECKED BY	DRAWING BY	PAGE?
			PROJECTION
			UNIT: mm