
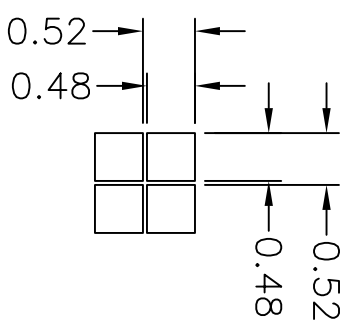

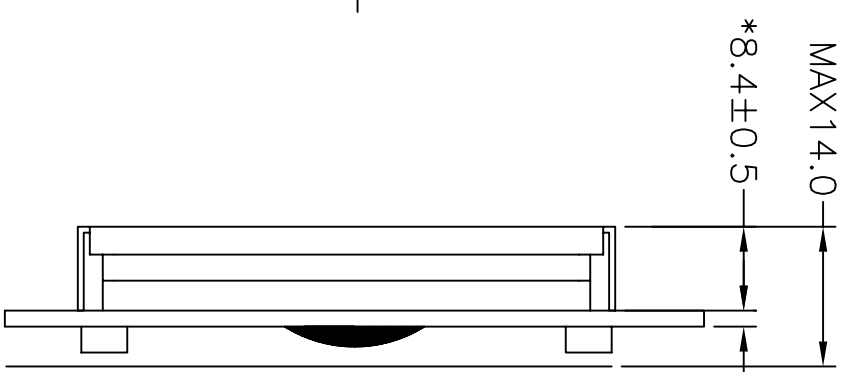


Customer approval :

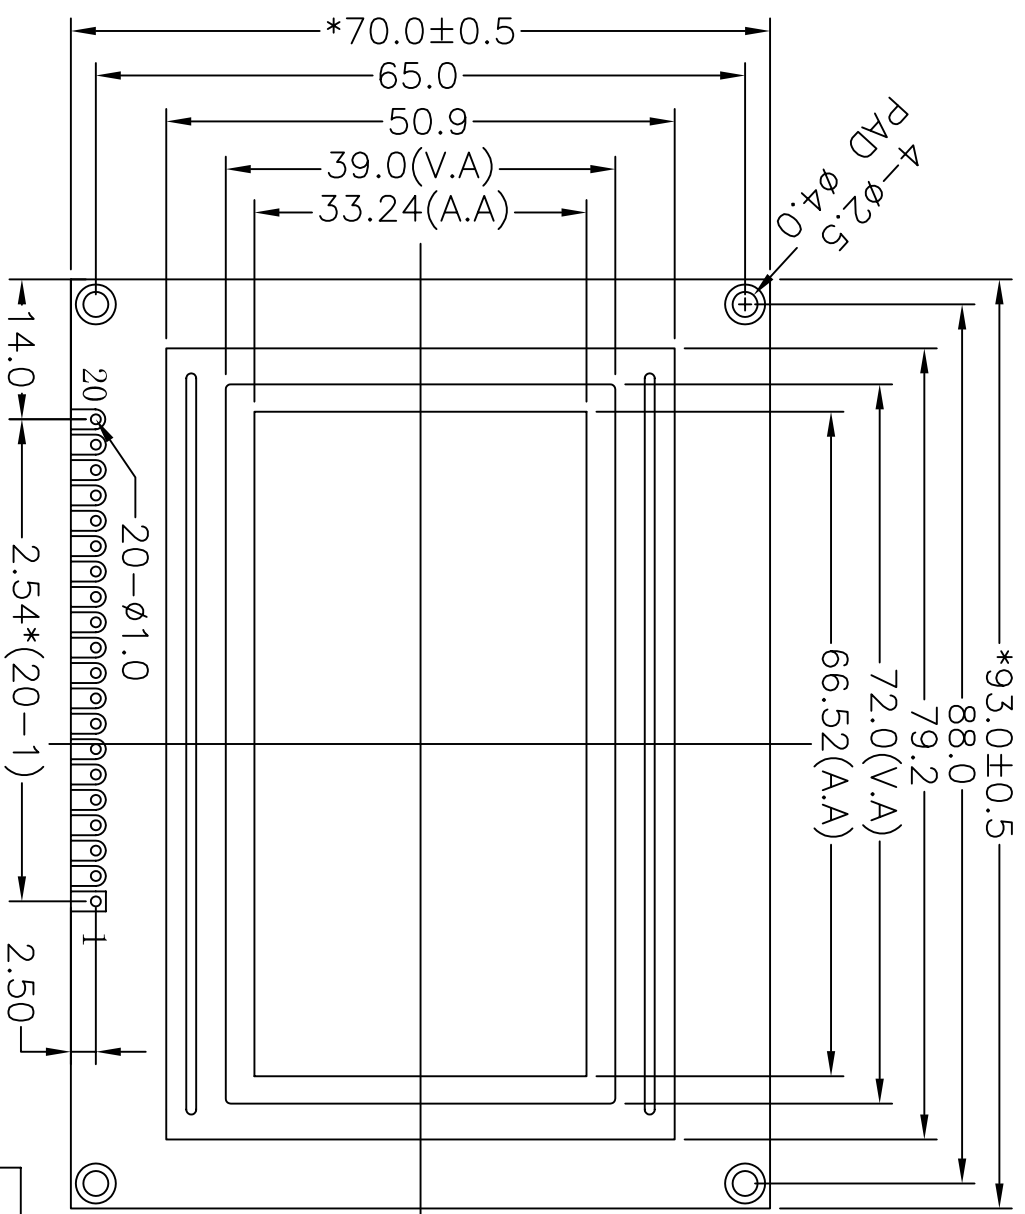

DOT SIZE  
SCALE 10:1

Specification:

- 1). Driving: Duty:1/64, Bias:1/9, VOUT:-4.9V,V0:-4.2V, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode:STN/Positive/Reflective/Transflective/YG
- 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
- 5). IC: AIP31107 and AIP31108
- 6). Backlight: EDGE,WHITE(BLA-BLK=5.0V)
- 7). Dimensions with mark "\*" are important,  
with mark "()" are referenced
- 8). All the raw materials are ROHS compliant

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	VSS	VDD	V0	C/D	R/W	E	DB0	DB1	DB2	DB3
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB4	DB5	DB6	DB7	/CS1	/CS2	/RST	VOUT	BLA	BLK

REV	REVISION RECORD	DATE
A0	First issue	11/12



深圳市三元晶科技有限公司  
Shenzhen TCC LCD Hi-Tech Co., Ltd.

MODEL NO. SYB12864C5V12-5C9YL3N7R-B5WG  
模组型号

APPROVED BY CHECKED BY DRAWING BY  
Jequil

11/12-2010  
PAGE: 1 OF 1  
PROJECTION 三角法  
UNIT: mm  
公差 X.XX ±0.3  
未注公差 X.XX ±0.1