


Customer approval :

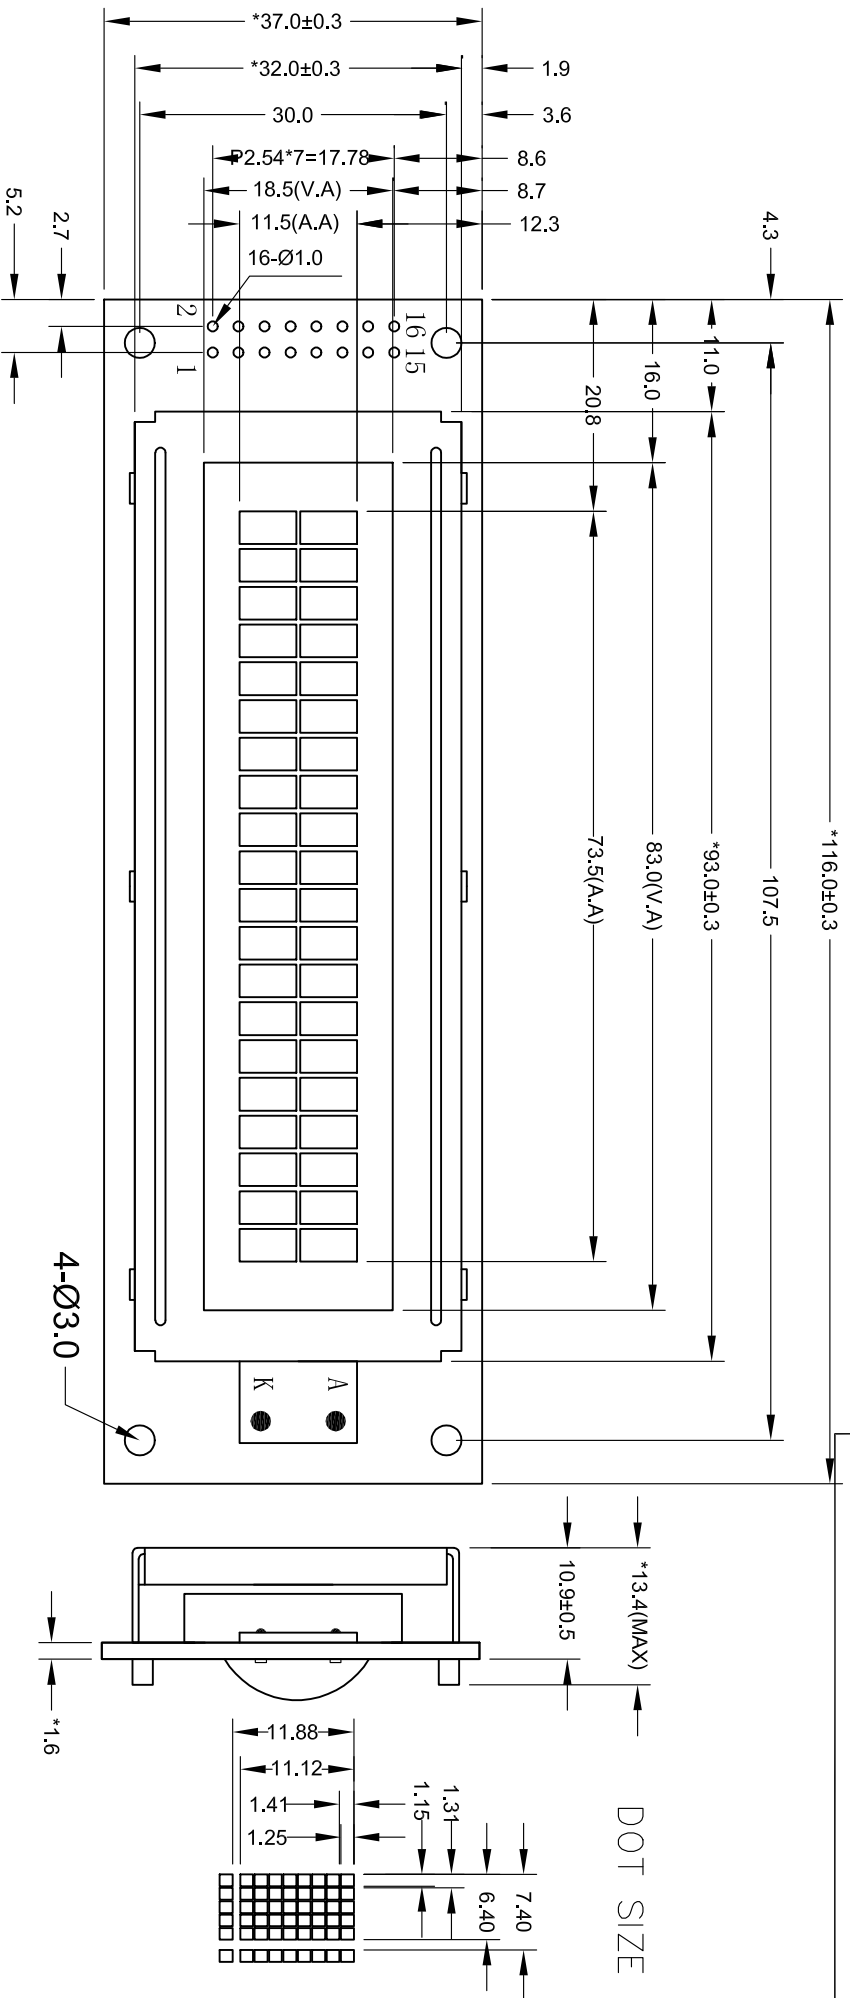

SPECIFICATION:

- 1). Driving: Duty:1/16, Bias:1/5, Vdd:5.0V, Vlcd:4.5V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: STN/Positive/Transflective/YG
- 4). Operating temp.:0°C~+50°C
- 5). Storage temp.: -10°C~+60°C
- 6). Control IC: SPLC780D1(Or Compatible)
- 7). BACKLIGHT: Array,YG
- 8). DIMENSIONS WITH MARK "*" ARE IMPORTANT WITH MARK "(") ARE REFERENCED
- 9). All the raw materials are RoHS compliant

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLK	BLA

REV	REVISION RECORD	DATE	TCC		MODEL NO.	CHECKED BY	DRAWING BY	GENERAL TOL:	
A	FIRST ISSUE	2010/9/23	 深圳市三元晶科技有限公司 Shenzhen TCCLCD HI-Tech Co., Ltd.		模组型号	审核	绘图	未注公差	
B					APPROVED BY	检查		三角法	±0.3
C					Liu	Francis	Luoxian		
D					2010/9/23	2010/9/23	2010/9/23		