



Customer approval :

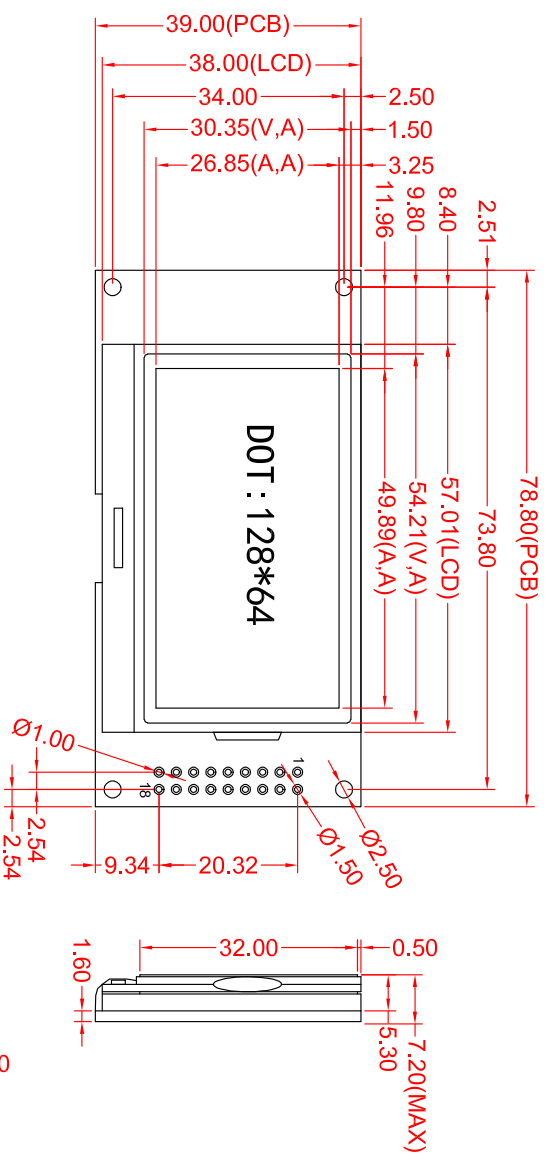

PIN	SPI-串口
1	/CS
2	/RST
3	A0
4	R/W
5	E
6	NC
7	NC
8	NC
9	NC
10	NC
11	NC
12	SCL
13	SDA
14	VDD
15	VSS
16	BLA
17	BLK
18	NC



- Specification:
- 1). Driving: Duty:1/65, Bias:1/9, VLCD=8.4V, VDD=3.3V
 - 2). Viewing direction: 6 o'clock
 - 3). Display mode:FFSTN/Negative/Transmissive
 - 4). Operating temp:-10°C~+60°C
 - 5). Storage temp: -20°C~+70°C
 - 6). Control IC: ST7567
 - 7). Backlight: White Array Vled: 5.0V
 - 8). dimensions with mark "***" are important with mark "()" are referenced
 - 9). All the raw materials are RoHS compliant

REV	REVISION RECORD	DATE	MODEL NO.	SYB12864QV10-CC38K-L89NC	GENERAL TOL:
A	FIRST ISSUE	2016/05/06			± 0.3
B			模组型号	SYB12864QV10-CC38K-L89NC	
C			APPROVED BY 审核	Checked BY 检查	PAGE: 页码 1 Of 1
D			Liu	Francis	PROJECTION 三角法

TCC 深圳市三元晶科技有限公司
ShenZhen TCCLCD HI-Tech Co., Ltd.