

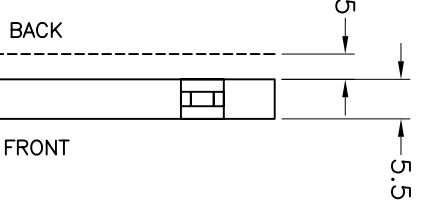


Customer approval :

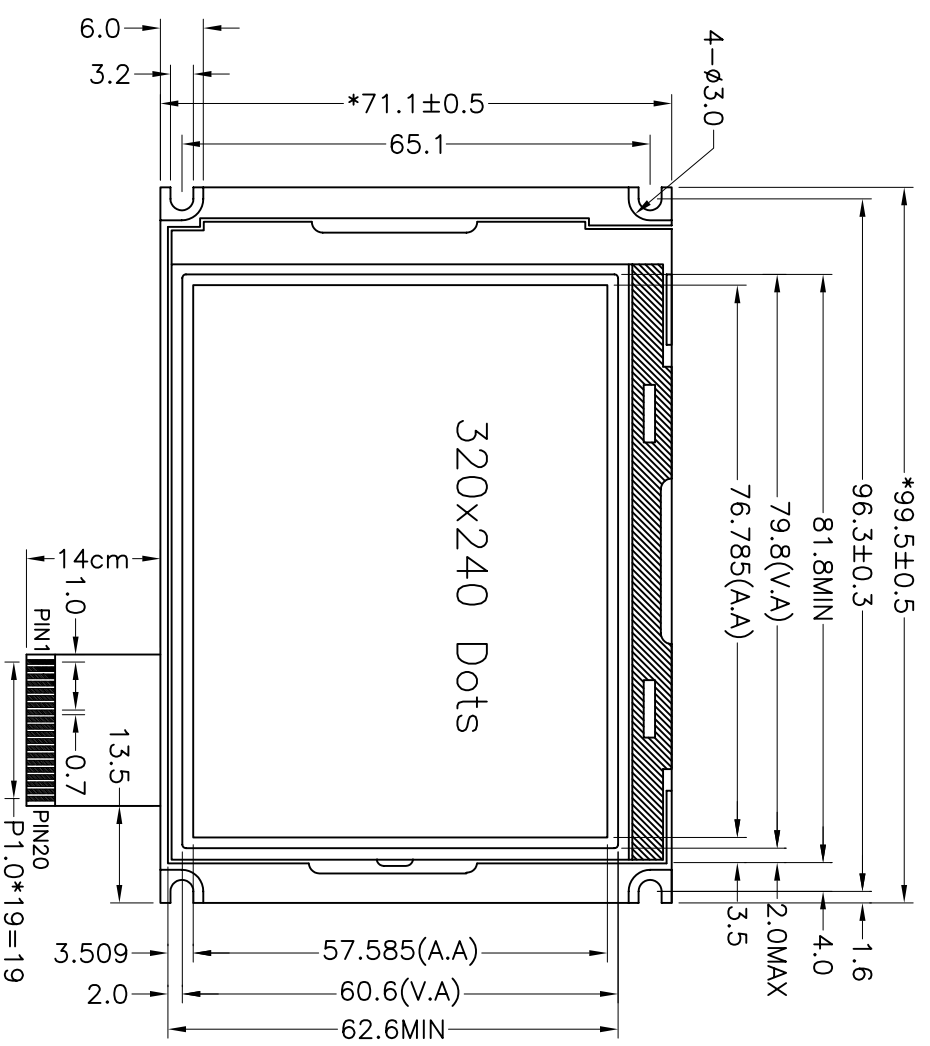

DOT SIZE
SCALE: 20:1

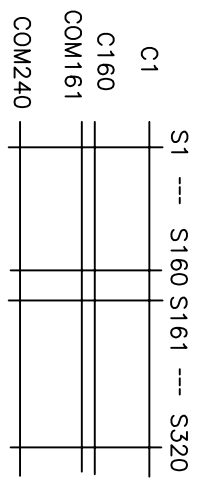

COM&SEG layout

SPECIFICATION:

- 1). Driving: Duty:1/240, Bias:1/12, VDD:5.0V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode:STN/Negative/Transmissive/Blue
- 3). Operating temp.: -10°C~+60°C
- 4). Storage temp.: -20°C~+70°C
- 5). Control IC: RA8806 or RA8803
- 6). BACKLIGHT Color: White
- 7). DIMENSIONS WITH MARK "*" ARE IMPORTANT WITH MARK "(" ARE REFERENCED
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
SYMBOL	GND	VDD	VO	WR	RD	CS	A0	RES	D0	D1	D2	D3	D4	D5	D6	D7	BUSY	VOOUT	BLA	BLK

REV	REVISION RECORD	DATE
A0	First issue	11-20



 深圳市三元晶科技有限公司
 Shenzhen TCC LCD Hi-Tech Co., Ltd

MODEL NO.	SYG320240LZKV11-5C7BLN6R-B5NZF	GENERAL TOL: ± 0.3
模 组 型 号		未 注 公 差
APPROVED BY	CHECKED BY	DRAWING BY
PAGE: 10F1	UNIT: mm	PROJECTION 三角法