

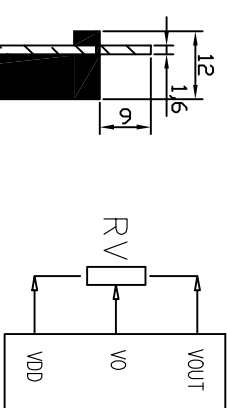


Customer approval :

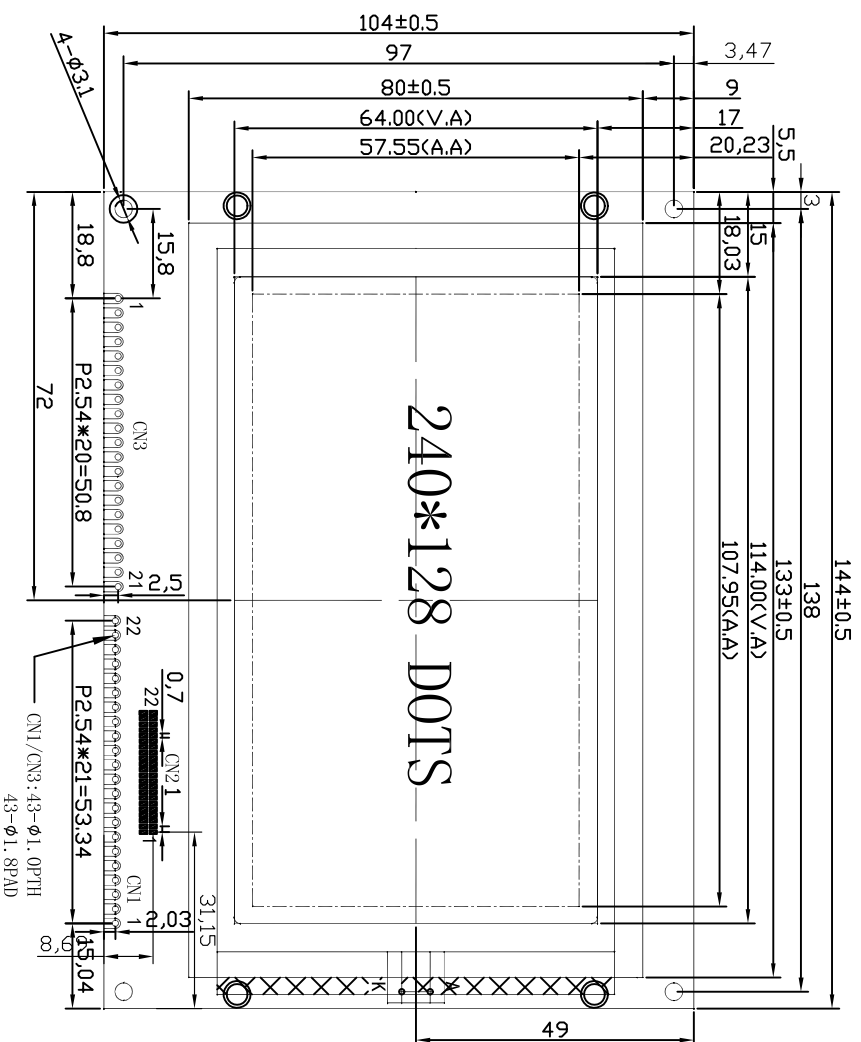

CN1/CN2:

PIN	CONNECTION
1	FG
2	VSS
3	VDD
4	V0
5	/MR
6	/RD
7	/CE
8	C/D
9	NC
10	/RES
11	DB0
...	...
18	DB7
19	FS
20	VOUT
21	BLA
22	BLK

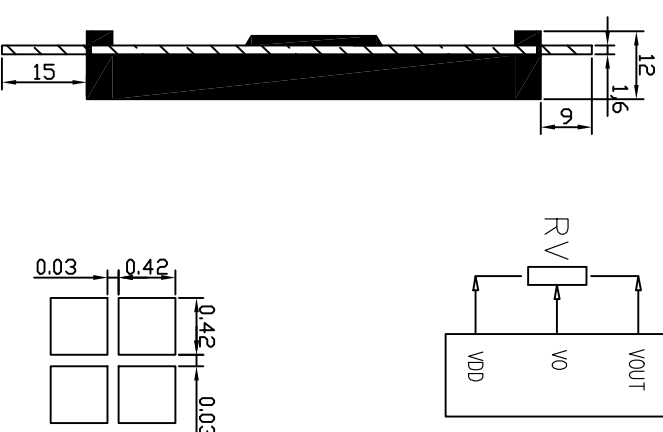

CN3	PIN	1	2	3	4	5	6	7	8	9	10
	CONNECTION	FG	VSS	VDD	V0	/MR	/RD	/CE	C/D	/RES	DB0
	PIN	11	12	13	14	15	16	17	18	19	20
	CONNECTION	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	BLA	BLK

SPECIFICATION:

- 1). Driving: Duty:1/240, Bias:1/12, V<sub>out</sub>-14.5V, V<sub>o</sub>-12.5V, V<sub>DD</sub>:5.0V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: STN/Negative/Transmissive/Blue
- 3). Operating temp.:0°C~+50°C
- 4). Storage temp.: -10°C~+60°C
- 5). Control IC: T6963C
- 6). BACKLIGHT Type: Edge,White
- 7). DIMENSIONS WITH MARK "\*" ARE IMPORTANT WITH MARK "<" ARE REFERENCED
- 8). All the raw materials are RoHS compliant

REV	REVISION RECORD	DATE
A0	First issue	2/27


**深圳市三元晶科技有限公司**  
 Shenzhen TCC LCD Hi-Tech Co., Ltd.

MODEL NO. SYM240128A3V20 GENERAL TOL: ± 0.3

APPROVED BY Liu CHECKED BY Francis DRAWING BY Luoxian

2012/02/27 2012/02/27 2012/02/27

PAGE: 1 OF 1 UNIT: mm  
PROJECTION