


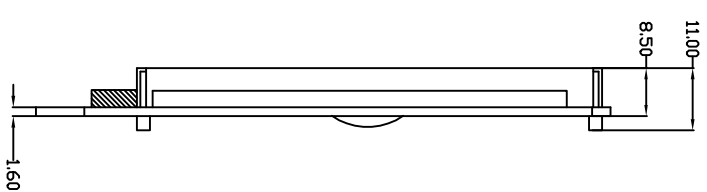


Customer approval :

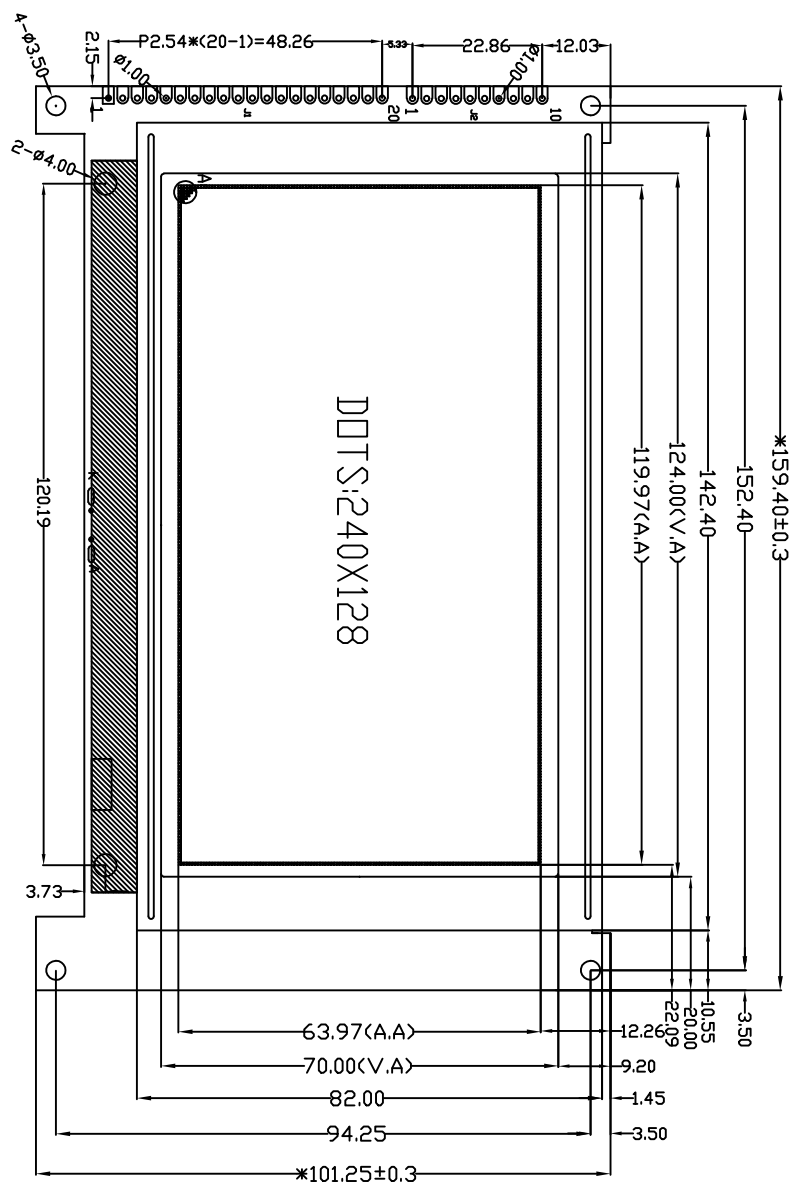

SPECIFICATION:

- 1). Driving: Dots:240*128, DUTY:1/128, BIAS:1/9,VDD:5.0V,VOUT:-14.5V,VO:-12.4V
- 2). Viewing angle: 6 0'CLOCK
- 3). Display mode:STN/BLUE MODE/TRANSMISSIVE/NEGATIVE
- 4). Operating temp: 0°C~+50°C
Storage temp: -20°C~+60°C
- 5). Controller IC:T6963/LC7981(Or Compatible)
- 6). Backlight: White
- 7). Dimensions with mark "*" are important,
with mark "(")" are referenced
- 8). All the raw materials are RoHS compliant

J1:

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
CONNECTION	GND	VDD	VO	C/D	/MR	RD	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	/CE	RST	VOUT	DISP	BLA	BLK

J2:

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	GND	VDD	VO	C/D	LP	CP	NC	VDD	GND	VOUT

REVISION RECORD		REV	REV	DRAWING NO.		DRAWING BY		UNIT:	GENERAL TOL:
First issue		A0		SYM240128HV30		LAN		mm	± 0.3
				APPROVED BY		DRAWING BY			PAGE
				2013/04		/15			1/1


深圳市三元晶科技有限公司
 Shenzhen TCC LCD Hi-Tech Co., Ltd.