



Customer approval :

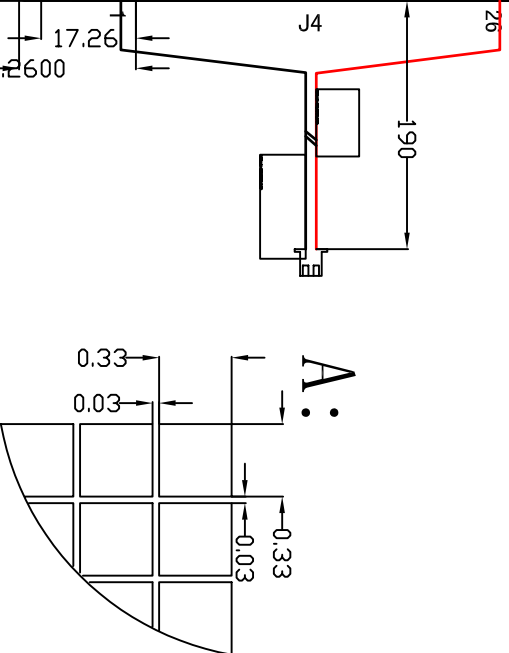

Specification:

- 1). Driving: Duty:1/240, Bias:1/17, VLCD:-21.5V(Ref), VDD:5V
- 2). Viewing Direction: 6 O'clock
- 3) Display mode: FSTN/OR(STN/Negative/Transmissive/Blue)
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). Controller IC: RA8835+TSC2046
- 6). Backlight: Bottom, YG
- 7). Dimensions with mark "*" are important,
with mark "()" are referenced
- 8). All the raw materials are RoHS compliant

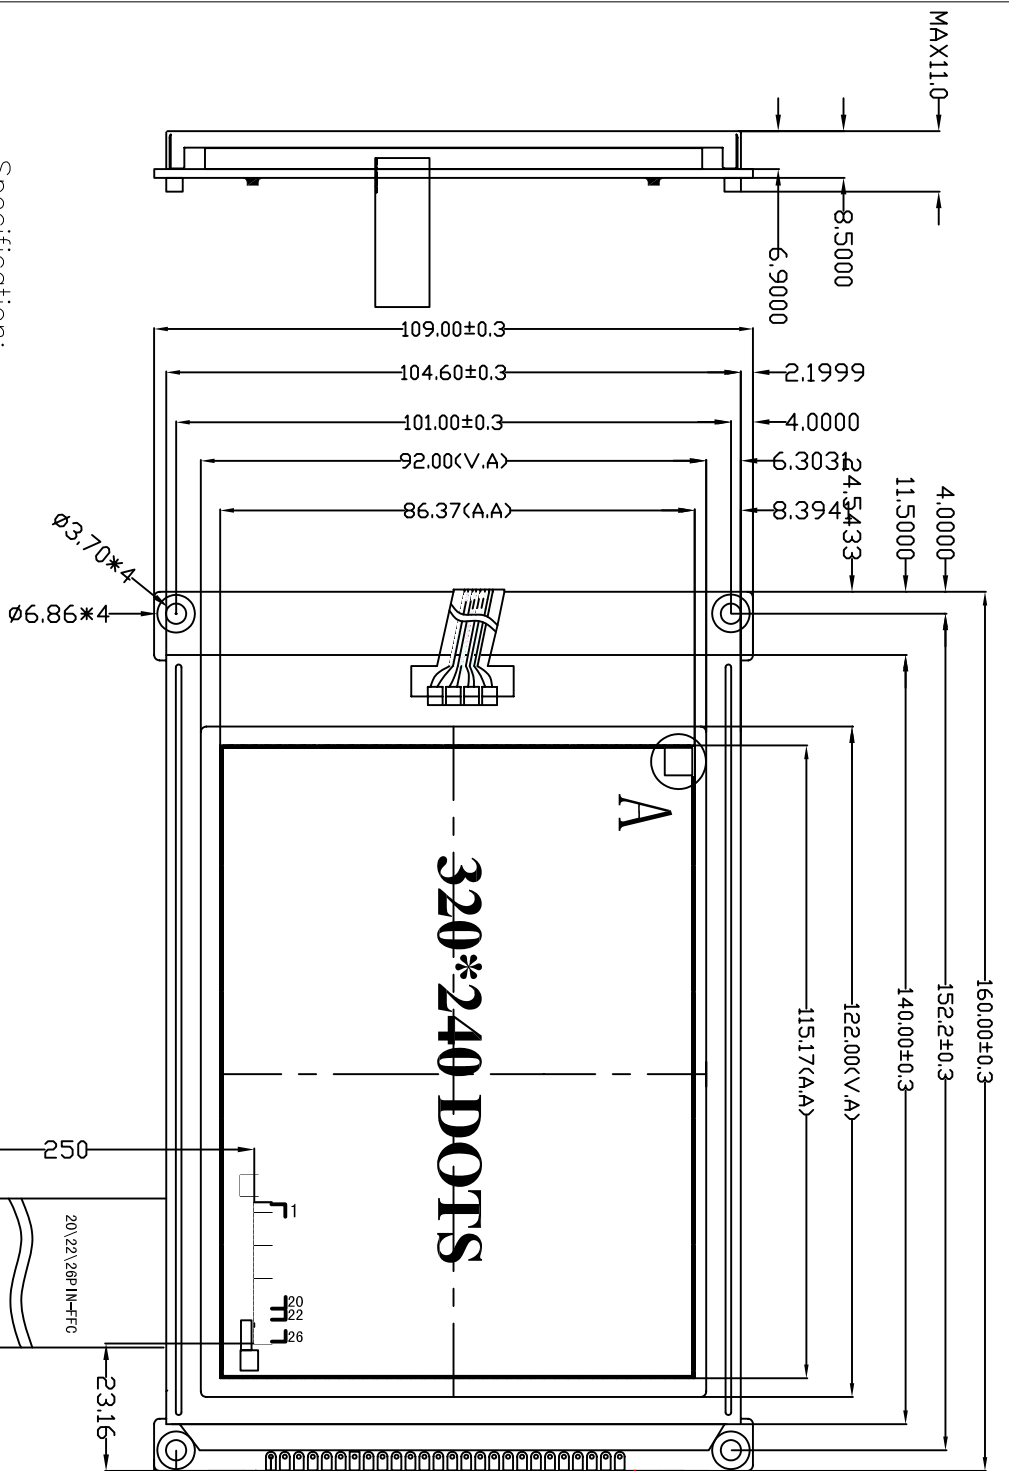

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13
CONNECTION	VSS	VDD	V0	A0	R/W	RD	DB0	DB1	DB2	DB3	DB4	DB5	DB6
PIN	14	15	16	17	18	19	20	21	22	23	24	25	26
CONNECTION	DB7	/CS	/RST	VOUT	SEL ₁ of BIA	DCLK	T-CS	DIN	DOUT	PEN	BUSY	IN3	IN4

REV	REVISION RECORD	DATE	MODEL NO.	检查组型号	CHECKED BY	DRAWING BY	GENERAL TOL:
A0	First issue	11/18	SYM320240B7V13				未注公差 ±0.3
			深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd				
APPROVED BY	CHECKED BY	DRAWING BY	PAGE:	页码	OF 1	UNIT:	mm
			PROJECTION		三角法		