




Customer approval :

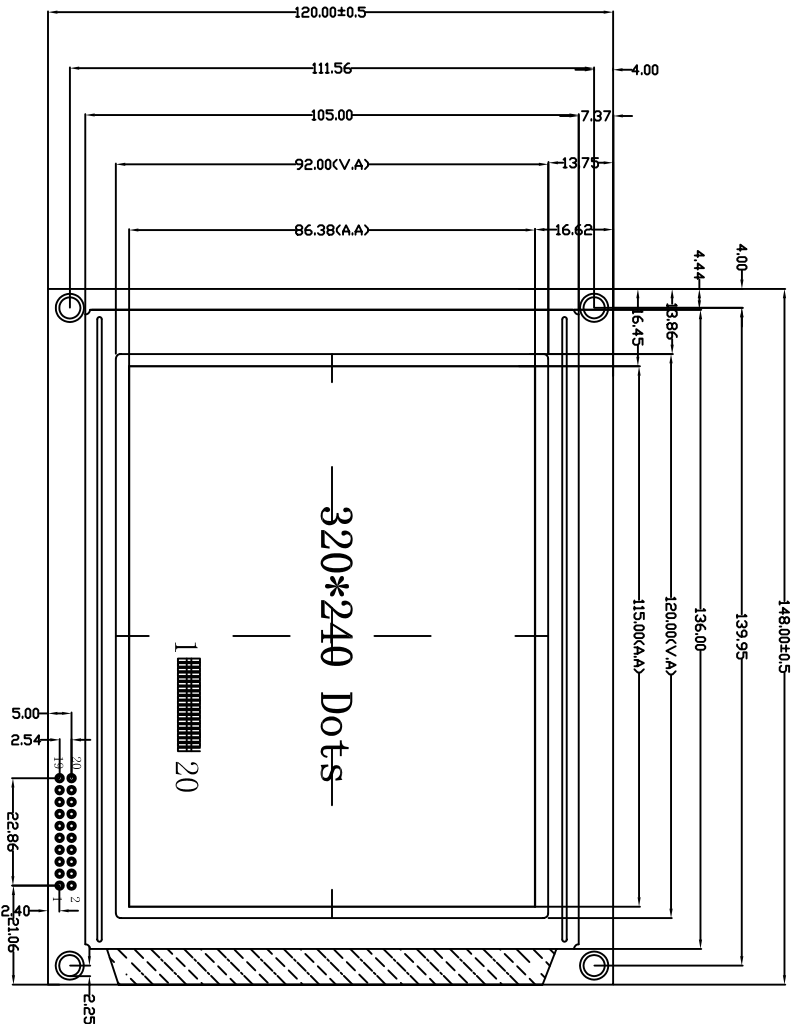

Specification:

- 1). Driving: Duty:1/240, Bias:1/12, VLCD:-21.5(Ref), VDD:5V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/BLUE MODE
- 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
- 5). Controller IC: S1D13700
- 6). Backlight: Bottom ,YG
- 7). Dimensions with mark "\*" are important,  
with mark "()" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	VSS	VDD	VO	RD	WR	A0	DB0	DB1	DB2	DB3
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB4	DB5	DB6	DB7	/CS	/RES	VOUT	FOND	BLA	BLK

REV	REVISION RECORD	DATE
A0	First Issue	11/18

**TCC** 深圳市三元晶科技有限公司  
Shenzhen TCC LCD Hi-Tech Co., Ltd

MODEL NO. SYM320240D3V10

模組型號  
APPROVED BY CHECKED BY DRAWING BY

GENERAL TOL: 公差表  
PAGE: 1 OF 1  
UNIT: mm  
±0.3

PROJECTION

三角法

