



Customer approval :

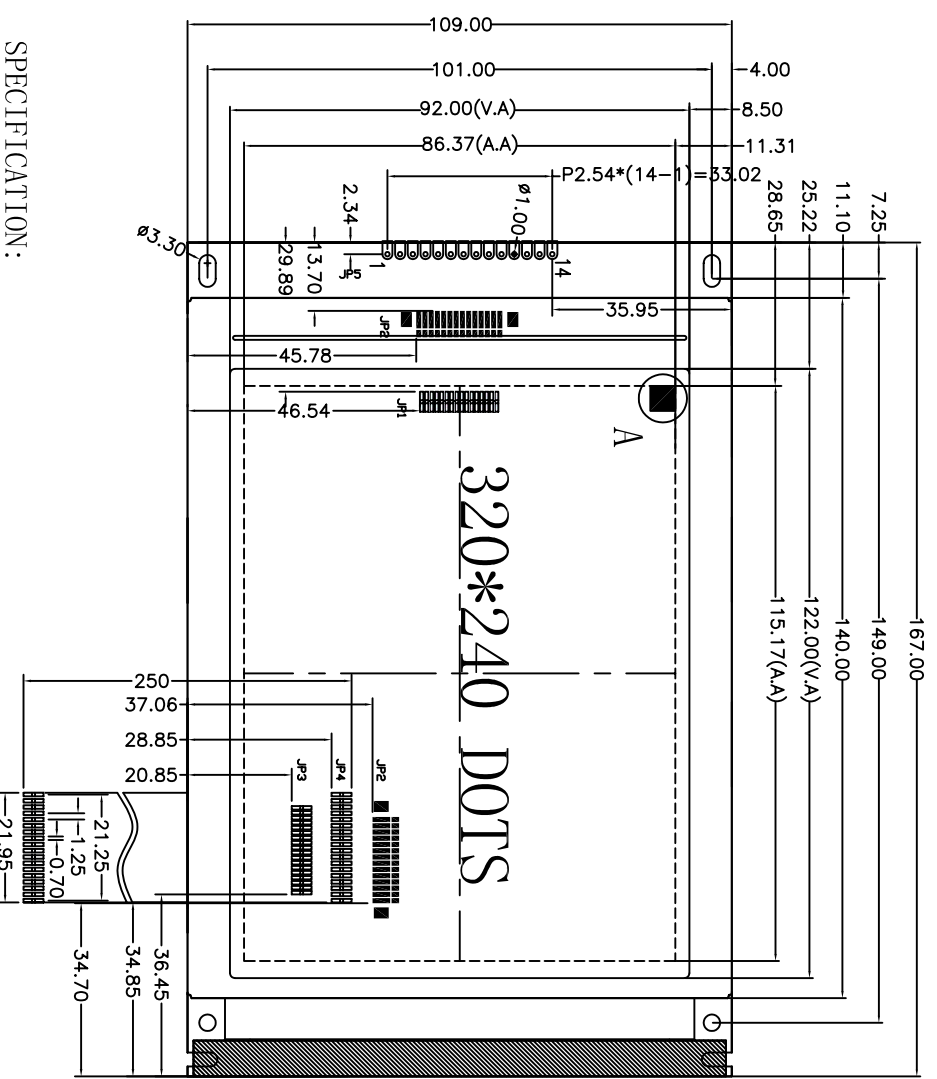

接口选择使用，FPC选择使用

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
JP1	JP2	JP3	JP4	JP5	JP21	JP22	JP23	JP24	JP25	JP26	JP27	JP28	JP29	JP30	JP31	JP32	JP33
FLM	LP	CP	DISP	VDD	GND	VOUT	DO	D1	D2	D3	NC	NC	NC	NC	GND		
D0	D1	D2	D3	DISP	FLM	NC	LP	CP	VDD	GND	VOUT	VO	FG				
TP-1	TP-2	TP-3	TP-4	DO	D1	D2	D3	DISP	FLM	NC	LP	CP	VDD	GND	VOUT	VO	FG2
DO	D1	D2	D3	DISP	FLM	NC	LP	CP	VDD	VSS	VOUT	VO	GND				

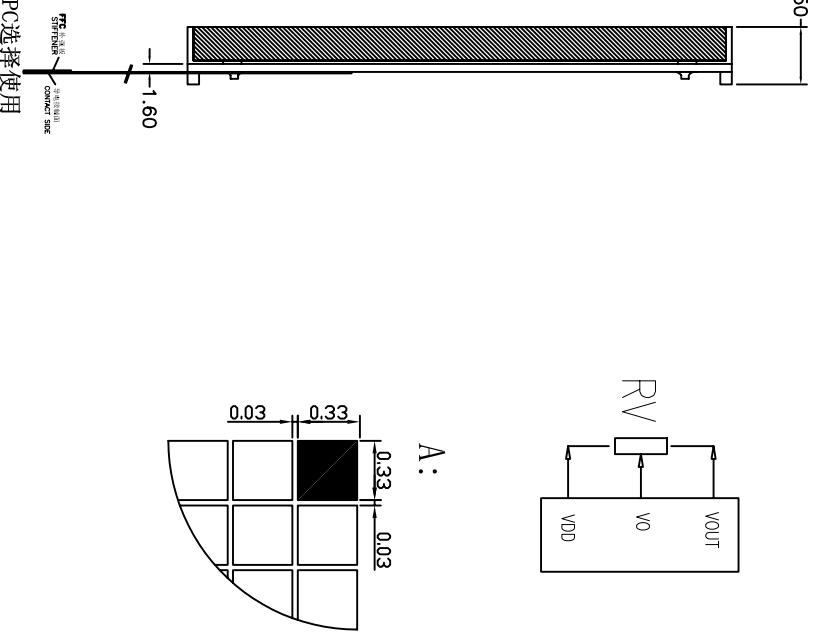

SPECIFICATION:

- 1). Driving: Duty:1/240, Bias:1/17, VOUT:28. 90V, VO:21. 40V, VDD:5V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: STN/Negative/Transmissive/Blue
- 4). Operating temp.: -20° C~+70° C
Storage temp.: -30° C~+80° C
- 5). Control IC: NO
- 6). BACKLIGHT Type: White 5V 90ma
- 7). DIMENSIONS WITH MARK "*" ARE IMPORTANT WITH MARK "()" ARE REFERENCED
- 8). All the raw materials are RoHS compliant

REV	REVISION RECORD	DATE
A0	First issue	05/15


深圳市三元晶科技有限公司
 ShenZhen TCC LCD Hi-Tech Co., Ltd.

MODEL NO.	SYT320240B4V10	GENERAL TOL: ±0.3
模 组 型 号		未 注 公 差
APPROVED BY	CHECKED BY	PAGE: 1 OF 1
	DRAWING BY	UNIT: mm
	LAN	PROJECTION 三角法