

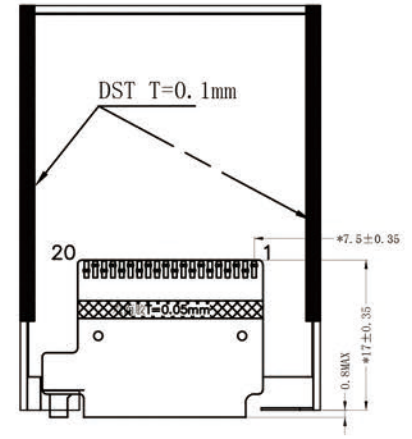
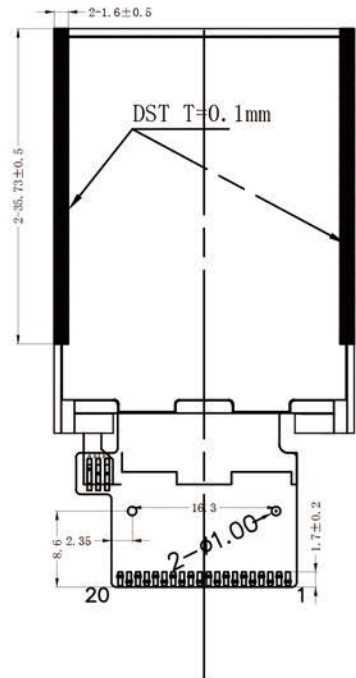


REV	DC/EC NUMBER	DESCRIPTION	DATE

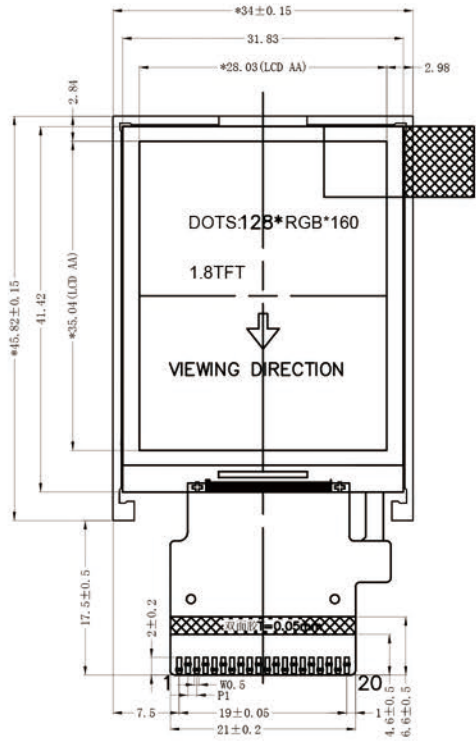

客户参考图

No:	PIN NAME
1	LEDK
2	LEDA
3	GND
4	VDD
5	IOVDD(1.8V)
6	NC
7	/CS
8	/RESET
9	RS
10	/WR
11	/RD
12	DB7
13	DB6
14	DB5
15	DB4
16	DB3
17	DB2
18	DB1
19	DB0
20	GND



- NOTES:
- 1.DISPLAY TYPE: TFT-LCD, TRANSMISSIVE, NORMAL WHITE
 - 2.OPERATING TEMP: -20°C~70°C
 - 3.STORAGE TEMP: -30°C~80°C
 - 4.LCD DRIVER: ILI9163C
 - 5.VIEWING DIRECTION: 12 O'CLOCK
 - 6.Backlight: white LED 2 CHIP
 - 7.GENERAL TOLERANCE: ±0.2

LEVEL	GENERAL LINEAR TOLERANCE			SELECT LEVEL
	1	2	3	
0 ~ 4	0.05	0.2	0.2	2
4 ~ 14	0.1	0.2	0.2	
14 ~ 63	0.1	0.2	0.4	
63 ~ 250	0.2	0.4	0.8	
250 ~ 600		0.6	1.0	
600 ~ 4000			1.6	
LEVEL	GENERAL ANGULAR TOLERANCE			SELECT LEVEL
	1	2	3	
RANGE	1'	2'	3'	

CRITICAL DIMENSION		SPEC DIMENSION		UNIT	SCALE	3rd ANGLE	MODEL NAME
				mm	1,000		SYC018MQ001NH
APPROVED				PART NUMBER/M-DRAWING NUMBER			PART NUMBER VER.
				SYC018MQ001NH			N/A
CHECKED				PART DESCRIPTION			DRAWING REV.
				LCM			1
DESIGNED				深圳市三元晶科技有限公司 ShenZhen TCCLCD Hi-Tech Co.,Ltd			SHEET NUMBER
				SIZE	A4		1 of 1